

# 12 Megapixel H.265 Day&Night Fisheye Network Camera

H.265  
HEVC

Weather Proof

Vandal-proof

IR

XE

Privacy Masking

POE

Profile S  
Onvif



MS-C9674-PB

DATASHEET

## KEY FEATURES

- ▶ H.265, twice efficient than H.264
- ▶ 1/1.7" Progressive Scan CMOS
- ▶ Up to 4000x3000@18fps
- ▶ 7 display modes to meet various needs
- ▶ Built-in Microphone and Audio out
- ▶ Equipped with Alarm In and Alarm Out
- ▶ IK10-rated vandal-proof metal cover, and high vandal resistant enclosure
- ▶ IP66-rated weather-proof housing
- ▶ Streamlined design, exquisite appearance, easy to blend in with the installation environment




# H.265 Day&Night Fisheye Network Camera



	Model	MS-C9674-PB (12MP)
Camera	Image Sensor	1/1.7" Progressive Scan CMOS
	Min. Illumination	Color: 0.01Lux@F1.2 0.04Lux@F2.4 B/W: 0Lux with IR on
	WDR	Super WDR up to 120dB
	Lens	1.98mm@F1.8
	Mount	M12
	Field of View	Wall Mount: 180°; Ceiling Mount: 360°; Table Mount: 360°
	Shutter Time	1/100000s~1/3s
	IR Distance	15m
	Day&Night	ICR Filter Auto Switch
Video	Max. Image Resolution	4000x3000
	Fisheye View Max. Frame Rate	18fps@(Main Stream: 4000x3000)+18fps(Secondary Stream: 1024x1024); 25fps(Main Stream: 3000x3000)+25fps(Secondary Stream: 1024x1024)
	Video Compression	H.265(HEVC)/H.264/MJPEG
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)
	Image Setting	Brightness/Contrast/Saturation/Sharpness
Display	Mount Mode	Wall Mount / Ceiling Mount / Table Mount
	Display Mode	Fisheye View, 360 Panorama View, 180 Panorama View, 4PTZ, Fisheye + 3PTZ, Panorama View+3PTZ, Fisheye + Panorama, View+ 3PTZ
Network	Ethernet	1*RJ45 10M/100M/1000M Ethernet Port
	Network Storage	NAS(Support NFS, SMB/CIFS)
	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, PPPoE, VLAN, 802.1x
Audio	Audio Compression	G.711/AAC
	Audio I/O	Built-in Microphone and 1 Audio Output interface
System	Alarm I/O	1/1
	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 128G
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, HLC, 3D-DNR, ROI, Anti-fog
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	Event Trigger	Motion Detection, Network Disconnection, Audio Alarm, External Input, etc.
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ External Output/ SIP Phone
	System Compatibility	ONVIF Profile S
General	Working Temperature	-30℃~60℃
	Working Humidity	0~90%(Non-condensing)
	Power Supply	PoE/ DC 12V±10%
	Power Consumption	4.8W MAX 8W MAX (With IR on)
	Weather Proof	Up to IP66-rated for Weather-resistant Performance
	Housing	Vandal-proof IK10-rated Metal Housing
	Weight	1100g
	Dimensions	Φ140mmX45.4mm
	Warranty	3/5 Years

# H.265 Day&Night Fisheye Network Camera

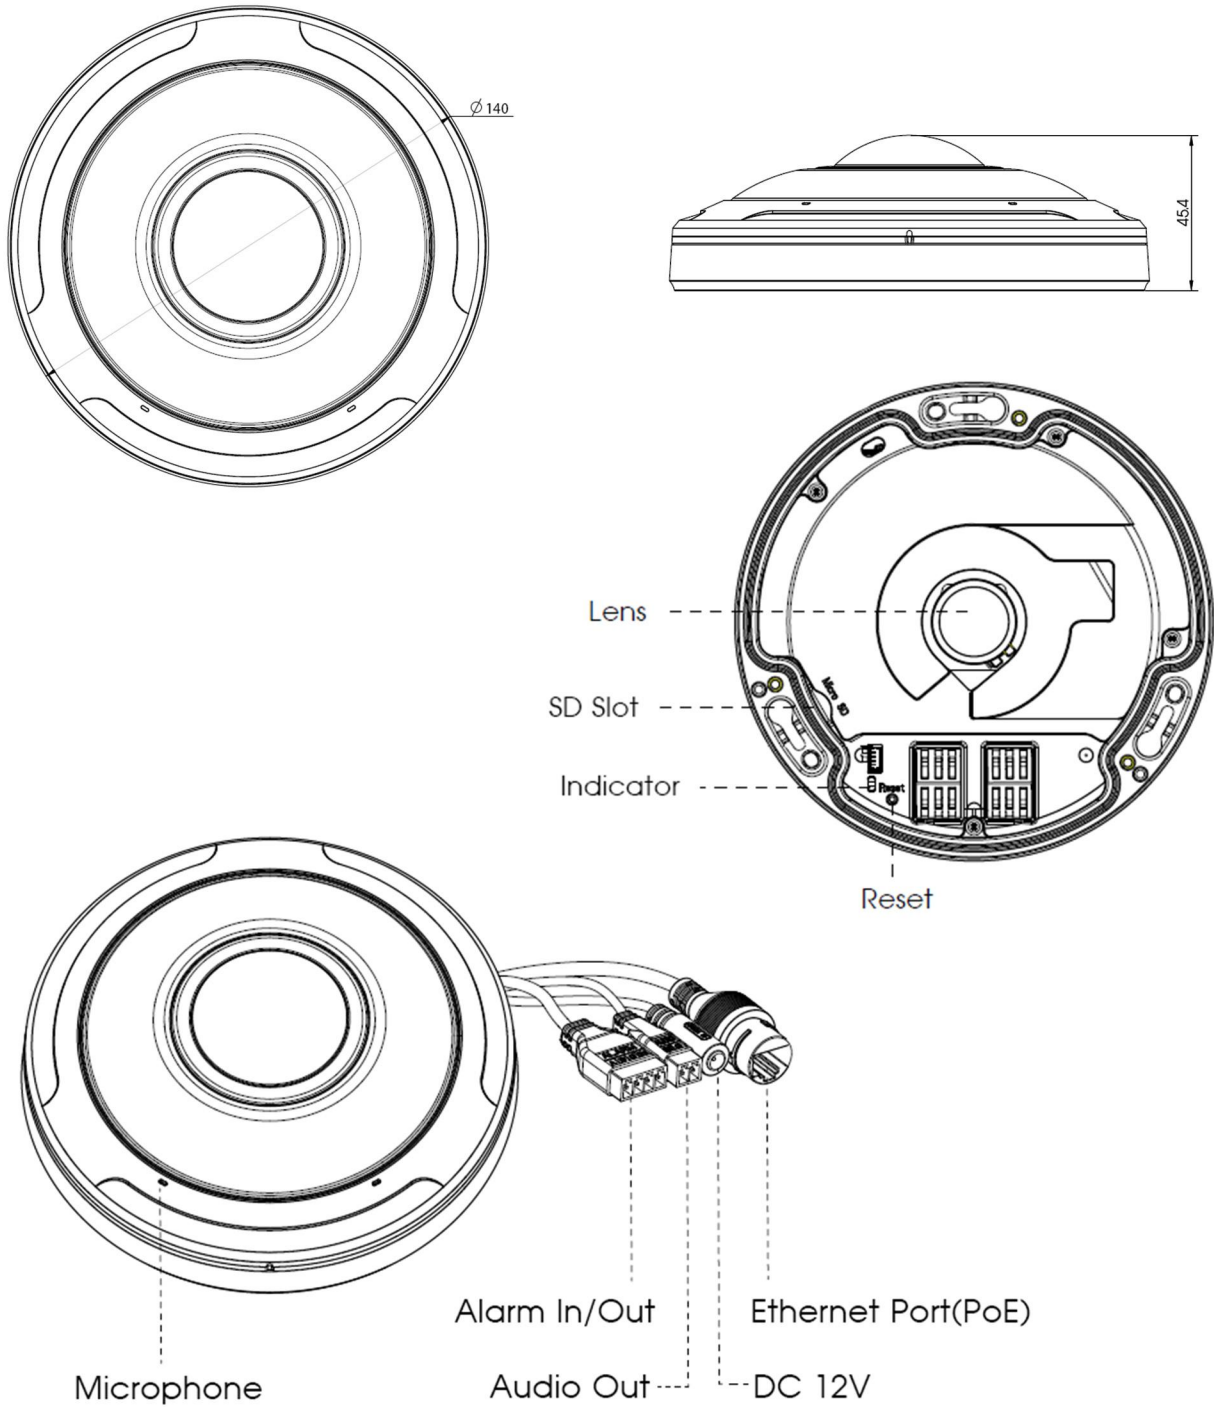

Units: mm

MS-C

9

9-12MP

6

Sensor

74-

Fisheye

PB

PoE+H.265

Milesight Technology Co.,Ltd. | [www.milesight.com](http://www.milesight.com)



Add: 7509 N.W. 36th Street, Miami, Florida 33166, USA  
Tel: +1-305-764-3474  
Mail: [sales@milesightusa.com](mailto:sales@milesightusa.com)

Add: 9F/901, Star Valley B/D Digital-ro 9gil 99, Geumcheon-gu, Seoul, Korea  
Tel: +82-070-8996-8940  
Mail: [charley@milesight.co.kr](mailto:charley@milesight.co.kr)

Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China  
Tel: +86-592-5922772  
Mail: [sales@milesight.com](mailto:sales@milesight.com)

